

A robust and stable unit

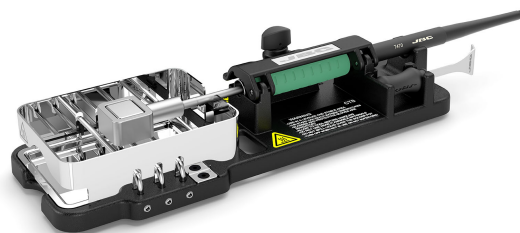
Residue tray: It is easily removeable for emptying and cleaning.

Protective Screen: It offers protection against accidents.

It can be employed with **C470SP01 Solder Pot Cartridge** and with **C470SP42 Solder Pot Cartridge** (for T470 handles) or **C245SP01 Solder Pot Cartridge** (for T245 handles).

To save space when CTS is used, T245 and T470 Handles can be directly connected to HDE, DI, DDE and DME Control Units with **CHB Converter**

Cartridges and handles are not included.

**REFERENCES**

CT-SA

PRODUCT COMPOSITION

1 - Instruction Manual
1 - CTS Solder Pot Stand

SPECIFICATIONS

Net weight 1,00 kg (2.20lb)

WEIGHT AND DIMENSIONS

Control Unit	245 x 92 x 48 mm / 1.00 kg 9.65 x 3.62 x 1.89 in / 2.20 lb
Package	342 x 155 x 120 mm / 1.31 kg 13.46 x 6.10 x 4.72 in / 2.89 lb